

# DURAPOLY



# INDUSTRIES

## Q.A. TANKS

The Best Value, Quality Assurance & Peace of Mind




“YOUR SUCCESS IS OUR SUCCESS”

191 N. Hwy 314A Silver Springs, FL 34488

Toll Free: 888-353-0280 Local: 352-625-5444 Fax: 352-625-7488

**DURAPOLY**  
**INDUSTRIES, INC.**  
**COMPLETE LINE OF STOCK & CUSTOM**  
**TANKS**

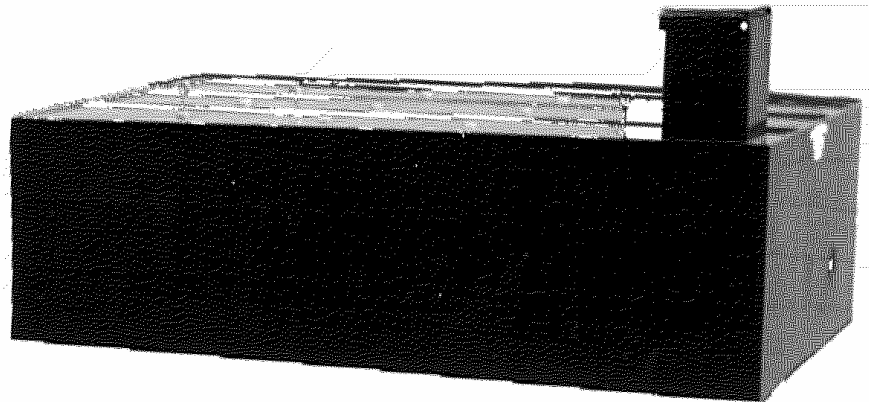

**DURAPOLY INDUSTRIES, INC. 191 HWY 314A**  
**SILVER SPRINGS, FL 34488**

Visit us on the web at: [www.durapoly.com](http://www.durapoly.com)

# DURAPOLY INDUSTRIES, INC.

## MANUFACTURING PROCESS

**3 AXES CNC ROUTER**



**EXTRUSION WELDING**



**12 HOUR WATER TEST**

**THERMOPLASTIC WELDING**



**SWASH PARTITIONS  
ON ALL TANKS**



At Durapoly we use a 3 axes CNC router for accurate layout and cutting of material. We also use extrusion & thermo plastic welding process. Swash baffles and t exceed NFPA 1901 requirements. Finished tank are put through quality control checks and our proprietary 12 hour water testing. Only then are they ready to ship to our customers. Put our 40 years of design and manufacturing experience to the test.

# DURAPOLY INDUSTRIES, INC.

191 N Hwy 314A Silver Springs, FL 34488

Tel: (352) 625-5444 (888) 353-0280 FAX: (352) 625-7488

## CORPORATE INTRODUCTION

Kalvin M. Francis – President Gary K. Francis – Vice President

DURA POLY INDUSTRIES INC. was established in 1998 with a clear mission statement of  
**DURABILITY.**

This mission statement is reflected in our corporate name and reflects our products, Commitment to our customers, which provide the foundation for the success of our customer's tank applications.

**Dura Poly has established a solid reputation in  
Design, Manufacturing with Quality Craftsmanship  
and Personal Customer Service**

**At Dura Poly, we think our tanks are the best quality  
controlled tanks on the market. To back that up our  
failure rate is limited to one small leak in our 4-year  
history of manufacturing**

**Quality Assurance (Q.A.) tanks.**

**A record unsurpassed and admired in the industry.**

When you purchase a tank, **think about your product reputation** if a tank failure occurs.

At Dura Poly our Proprietary testing procedure is performed on each tank prior to shipment. This assures you, our customers, of a quality product every time and if a leak or failure occurs, it occurs at our plant and not with you the end user.

At Dura Poly we have in mind **your** corporate reputation when we build your next quality tank.

**BOTTOM LINE:**

**You are buying the best Value, Quality Assurance and Peace of Mind  
in the industry.**

**YOUR SUCCESS IS OUR SUCCESS**

**BUY A Q.A. TANK**

**AND EXPERANCE THE DURA POLY DIFFERENCE**

# DURAPOLY INDUSTRIES, INC.

## STANDARD SKID TANKS

TANKS ARE  
AVAILABLE IN 200,250  
AND 300 GALLONS

**ADDITIONAL  
OPTIONS:  
FOAM CELLS  
HOSE TRAYS**



### STANDARD SKID TANK CONSTRUCTION

Tanks are made of UV stabilized polypropylene, black in color, **Outside thickness** of all tanks is **1/2"** thick.

Tank is equipped with longitudinal and transverse baffles, which exceed NFPA Bulletin #1901 requirements. Longitudinal and transverse baffles are 3/8" thick.

Tank is equipped with **internal sight glass & 10" sq. fill tower** with hinge pin lid and removable poly screen type strainer.

Tank serial number is under fill tower lid. Tank is equipped with (1) one **3" I.D. Sch'd. 40 overflow vent** pipe, piped from fill tower to rear of tank, recessed at overflow exit.

Tank is equipped with (1) one **1 1/2" NPT female coupling for pump to tank fill line**, equipped with deflection shield inside tank.

Tank is equipped with (1) one **3" NPT female coupling for tank to pump** in front of tank, piped to tank floor sump. Sump is equipped with anti-swirl plate. **Tank base is 48" wide by 92" long.**

Tank height depends on gallons. **Hose reel mounts provide on top of tank.** Tank mounting will be simple cradle style, strapped or spring bolted.

**DURAPOLY INDUSTRIES, INC. HWY 19 314A  
SILVER SPRINGS FL 34488**

Ph: 352-625-5444 Fax: 352-625-7488 or Visit us on the web at: [www.duraploy.com](http://www.duraploy.com)

# DURAPOLY INDUSTRIES, INC.

## CUSTOM SKID TANKS TANKS AVAILABLE IN 100 TO 1000 GALLONS



### STANDARD SKID TANK CONSTRUCTION

Tanks are made of UV stabilized polypropylene. Black in color, **outside thickness** of all tanks is **1/2"** thick.

Tank is equipped with longitudinal and transverse baffles, which exceed NFPA Bulletin #1901 requirements. Longitudinal and transverse baffles are 3/8" thick.

Tank is equipped with **internal sight glass & 10" sq. fill tower** with hinge pin lid and removable poly screen type strainer.

Tank serial number is under fill tower lid. Tank is equipped with (1) one **3" I.D. Sch'd. 40 overflow vent** pipe, piped from fill tower to rear of tank, recessed at overflow exit.

Tank is equipped with (1) one **1 1/2" NPT female coupling for pump to tank fill line**, equipped with deflection shield inside tank.

Tank is equipped with (1) one **3" NPT female coupling for tank to pump** in front of tank, piped to tank floor sump. Sump is equipped with anti-swirl plate. **Tank base is 48" wide by 92" long.**

Tank height depends on gallons. **Hose reel mounts provide on top of tank.** Tank mounting will be simple cradle style, strapped or spring bolted.

**Tank option and variations available to suite customers specific requirements**

**DURAPOLY INDUSTRIES, INC. HWY 19 314A  
SILVER SPRINGS FL 34488**

Ph: 352-625-5444 Fax: 352-625-7488 or Visit us on the web at: [www.duraploy.com](http://www.duraploy.com)

# DURAPOLY INDUSTRIES, INC.

## CUSTOM RECTANGLE & “T” TANKS

TANKS AVAILABLE IN 100 TO 3500 GALLONS



TANKS BUILT TO YOUR SEPCIFICATIONS,  
INCLUDING FOAM CELLS, HOSE TRAYS,  
MOUNTING BLOCKS, PLATFORMS, 4” TO 10” PASS  
THRU, DIRECT FILLS, DUMP VLV MOUNTING  
AND LADDER BOX PASS THRU

### TANK CONSTRUCTION

Tanks are made of UV stabilized polypropylene, black in color. **Outside thickness** of all tanks is **1/2”** thick.

Tank is equipped with longitudinal and transverse baffles, which exceed NFPA Bulletin #1901 requirements.

Longitudinal and transverse baffles are 3/8” thick. Tank is equipped with **12” sq. fill tower** with hinge pin lid and removable poly screen type strainer. Tank serial number is under fill tower lid.

Tank is equipped with (1) one **4” I.D. Sch’d. 40 overflow vent pipe**, piped from fill tower to rear of tank, recessed at overflow exit. Overflow extending behind chassis rear wheels.

Tank is equipped with (1) one **1 1/2” NPT female coupling for pump to tank fill line**, equipped with deflection shield inside tank.

Tank is equipped with (1) one **3” NPT female coupling for tank to pump** in front of tank, piped to tank floor sump. Sump is equipped with anti-swirl plate.

Tank mounting will be simple cradle style.

**Tank option and variations available to suite customers specific requirements**

**DURAPOLY INDUSTRIES, INC. HWY 19 314A  
SILVER SPRINGS FL 34488**

Ph: 352-625-5444 Fax: 352-625-7488 or Visit us on the web at: [www.duraploy.com](http://www.duraploy.com)